
MKey PRO Update Firmware SOP

English	P.2
繁體中文	P.8

MKey PRO

English


Step 1: Download and Install QMK Toolbox

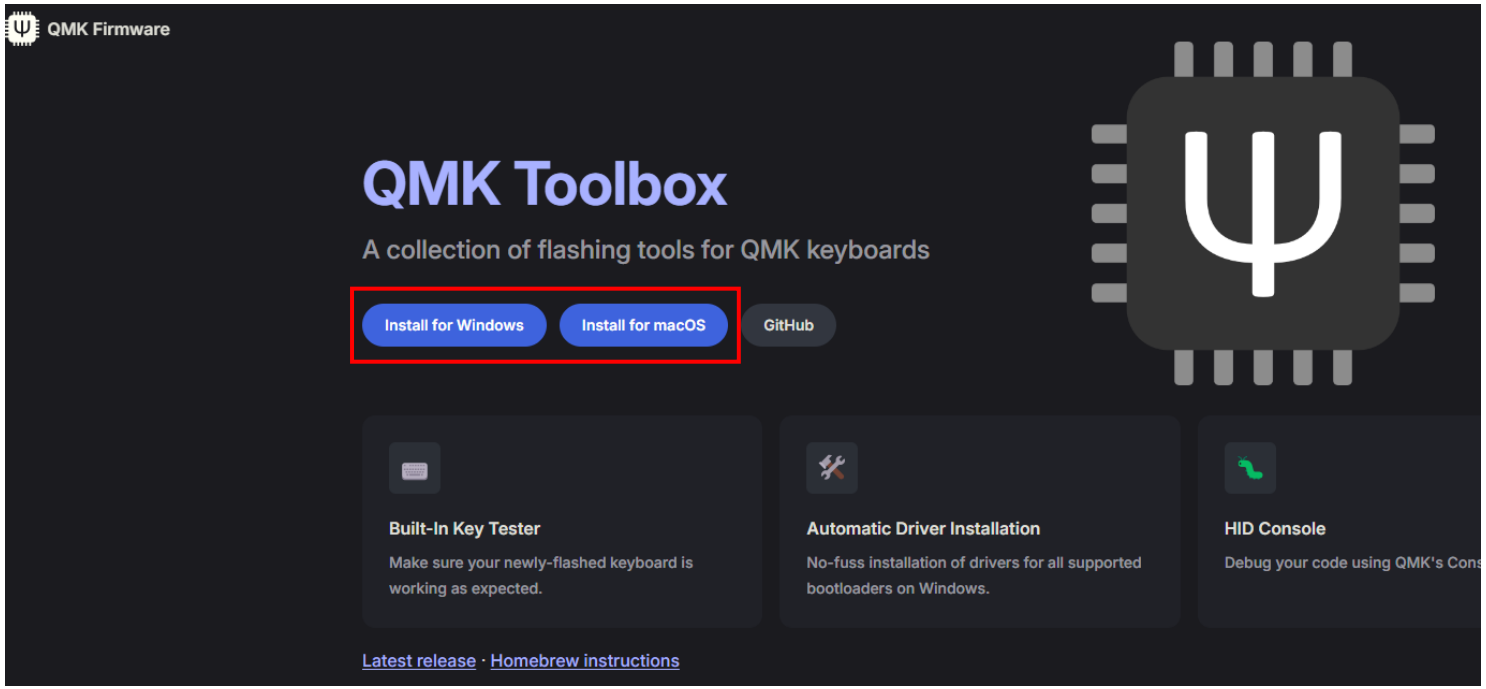

https://qmk.fm/toolbox

Download and install QMK Toolbox through the link.

Step 2: Get Ready for QMK Toolbox

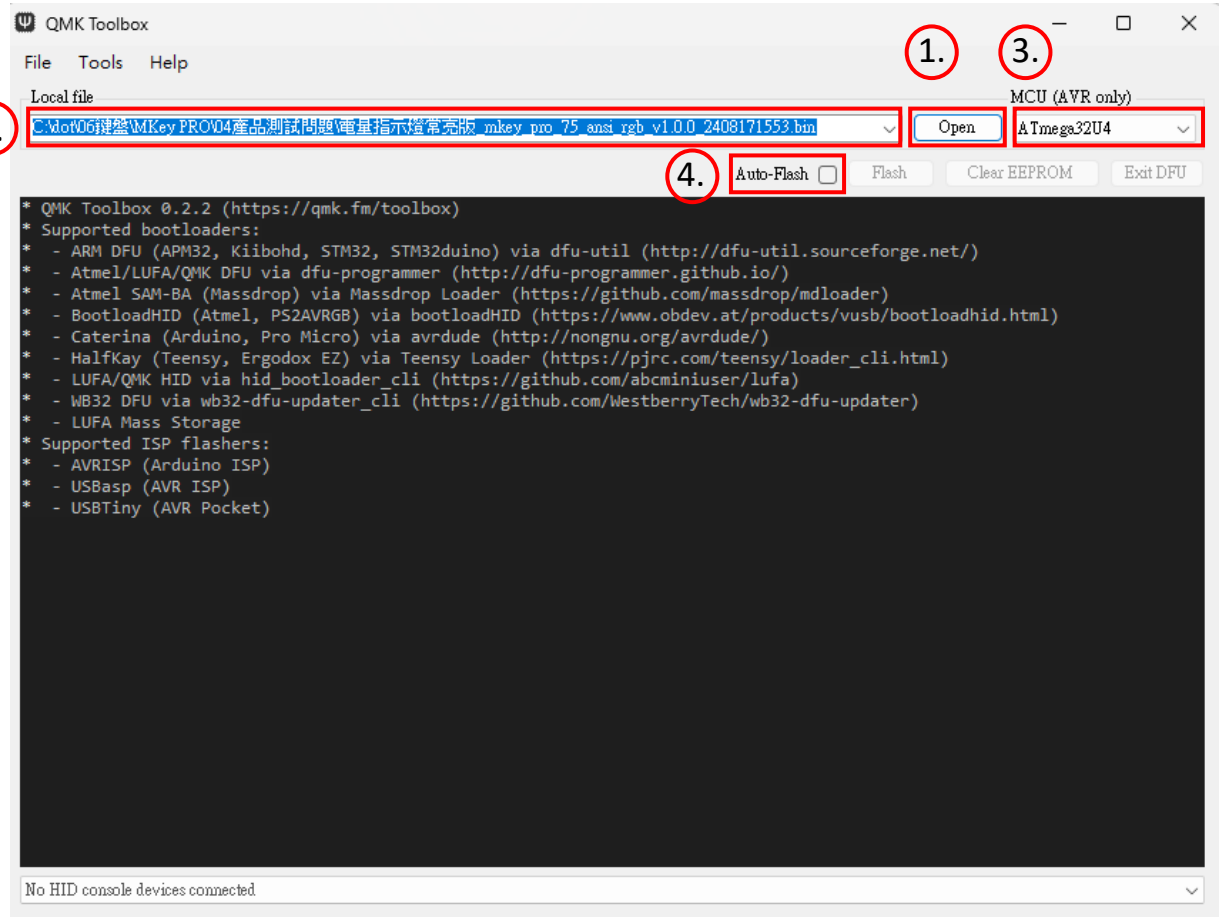

1.
Click “Open”.

2.
Find out the bin document which is provided by MONTECH.

3.
Click “MCU” and select “ATmega32U4”.

4.
Choose “Auto-Flash”.

Step 3: Get Ready for MKey PRO




1.
Set the switch to USB mode.
Connect the cable between MKey PRO and the device.

2.
Press and hold “ESC” key.

3.
Remove the cable (Type-C) from MKey PRO.

4.
Connect the cable(Type-C) to MKey PRO again.
Release the “ESC” key you kept pressing.

Step 4: Finish the Update Process

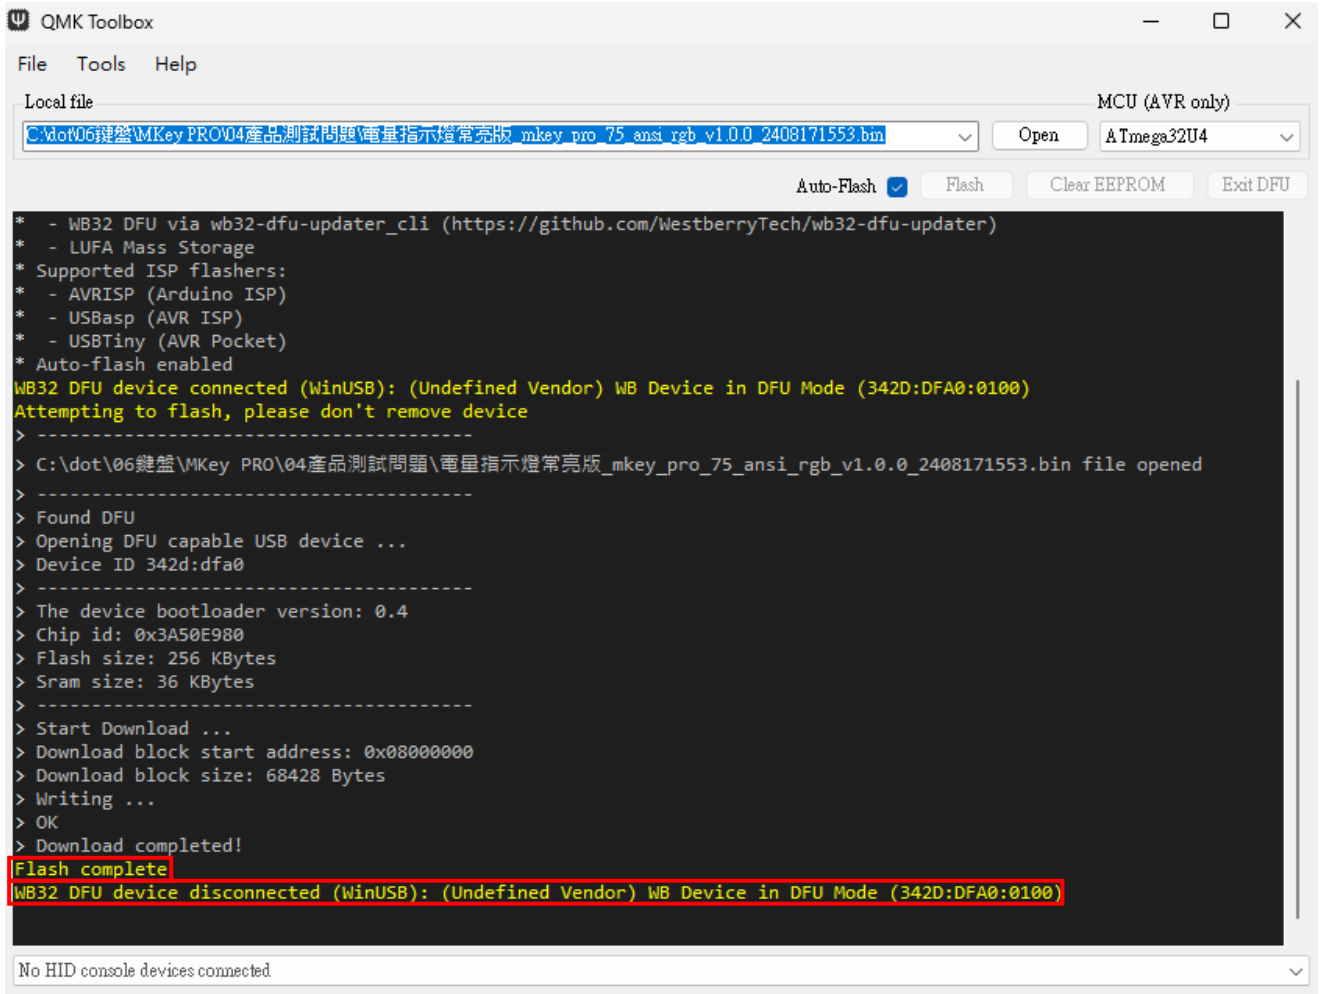

1.
After step 3, you will see “Flash complete”.

2.
Remove the cable (Type-C) from MKey PRO again.
Connect the same cable (Type-C) to MKey PRO again.
MKey PRO’s ARGB will be turned on again.
The whole process is finished.

bin Documents

- ANSI_MKey PRO_260831
- ISO_MKey PRO_260831

- 260831 version (ANSI & ISO) – released on Aug. 31st, 2026.
- Fixed Fn+F4 (F4), knob must be functional even the light is off.

- 260407 version (ANSI) – released on Apr. 7th, 2026.
- Fixed resume-from-sleep.


- 250514 version (ANSI) – released on May 14th, 2025.
- 250609 version (ISO) – released on Jun 9th, 2025.
- Update reset system.

- 241127 version (ANSI & ISO) – released on Nov 27th, 2024.
- Update Ins and End hotkey (Fn+PgUp=Ins / Fn+PgDn=End).
- Update Fn+F4 (F4), knob must be functional even the light is off.

MKey PRO

繁體中文


第一步：下載與安裝QMK Toolbox

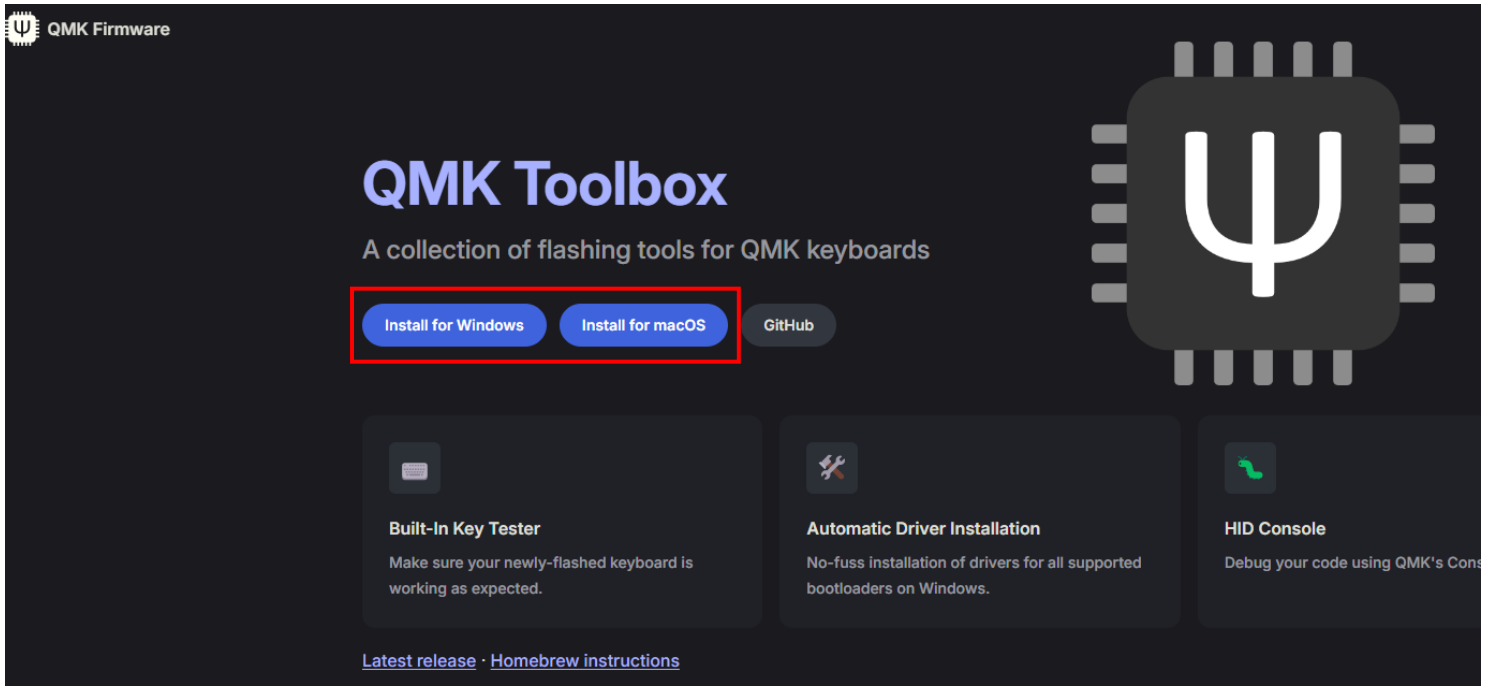

https://qmk.fm/toolbox

透過連結下載與安裝QMK Toolbox。

第二步：準備好QMK Toolbox

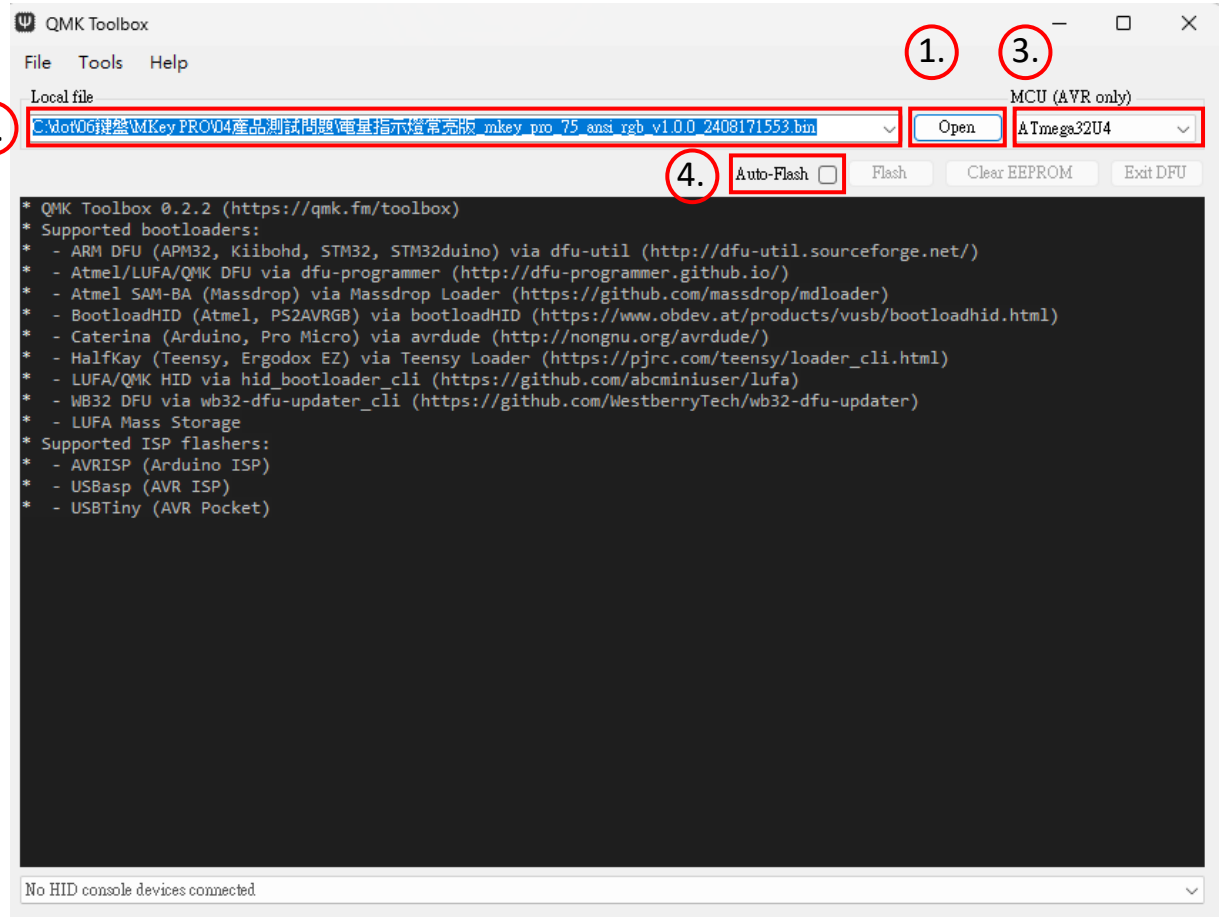

1.
點選「Open」。

2.
找到MONTECH提供的bin檔文件。

3.
點選「MCU」並選擇「 ATmega32U4」。

4.
選擇「 Auto-Flash」。

第三步：準備好MKey PRO




1.
將模式開關切換至USB模式。
用線材連接MKey PRO和設備。

2.
按住「ESC」鍵。

3.
拔除連接在MKey PRO的Type-C端口線材。

4.
再次將Typc-C端口線材連接至MKey PRO。
鬆開按住的「ESC」鍵。

第四步：完成更新

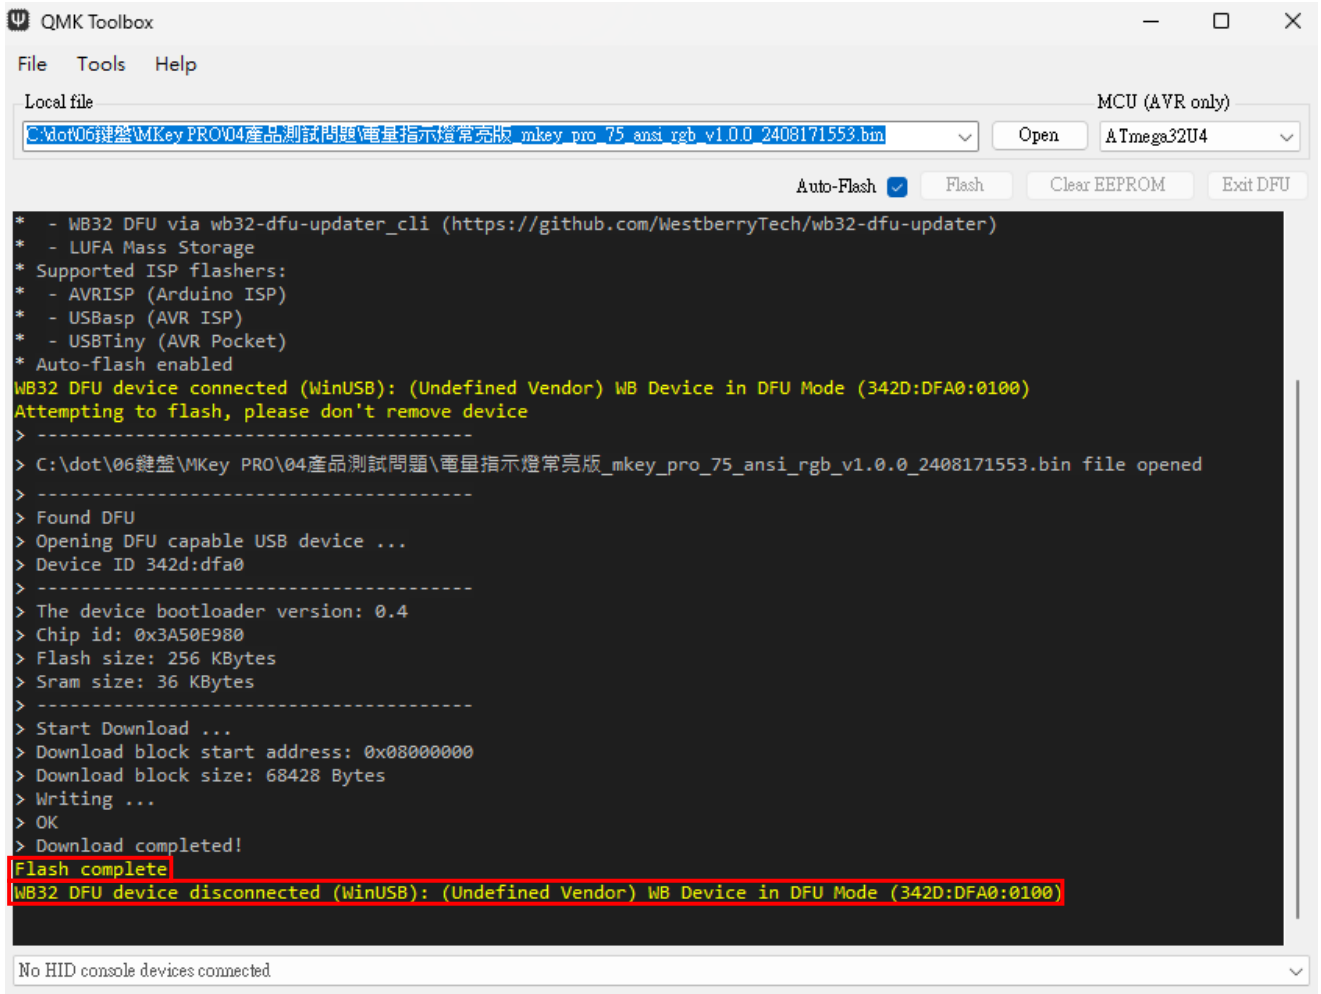

1.
完成第三步後，畫面會出現「Flash complete」。

2.
再次拔除連接在MKey PRO的Type-C端口線材。
再次將Typc-C端口線材連接至MKey PRO。
MKey PRO的ARGB燈效將會再次亮起，即完成更新。

bin檔文件

- ANSI_MKey PRO_260831
- ISO_MKey PRO_260831

- 260831版本(ANSI & ISO)於2026年08月31日發布。
- 修正Fn+F4(F4)，即使關閉旋鈕燈效，旋鈕仍具備功能。

- 260407版本(ANSI)於2026年04月07日發布。
- 修正休眠恢復功能。

- 250514版本(ANSI)於2025年05月14日發布。
- 250609版本(ISO)於2025年06月09日發布。
- 更新復位機制。

- 241127版本(ANSI & ISO)於2024年11月27日發布。
- 更新Ins和End快捷鍵(Fn+PgUp=Ins / Fn+PgDn=End)。
- 更新Fn+F4(F4)，即使關閉旋鈕燈效，旋鈕仍具備功能。